

BRIXIA

OPENING THE SAFE

The safe will arrive open - First you must install the 9V battery inside the safe - The battery must be placed in the black box positioned inside the door, after having connected the battery, wait 10 seconds (both the first time and whenever the battery is changed).

ON ☀️

2 0 4 0 6 0 ☀️

(DEFAULT CODE)

⬅️ 🎵

☀️ 🎵 🎵 🎵 **Correct code**

☀️ 🎵 **Incorrect or deactivated code**

HOW TO CLOSE THE SAFE

With the bolts withdrawn close the door and turn the handle, the safe will lock automatically.



CHANGING THE USER CODE

DO THIS WITH THE SAFE OPEN

ON ☀️

Enter the user code already set (user #1)

2 0 4 0 6 0 ☀️ 🎵

* ☀️ 🎵

⬅️ ☀️ 🎵

Enter new code (example):

4 4 4 4 4 4 ☀️ 🎵

⬅️ ☀️ 🎵

Enter new code again (example):

4 4 4 4 4 4 ☀️ 🎵

⬅️ ☀️ 🎵



User 2 is also preset in the lock

2 2 2 2 2 2

BS-Upd-Inst-001

USER INSTRUCTIONS

CHANGING THE MASTER CODE

THIS IS VERY IMPORTANT

This code will allow you to change the user codes/ settings on your safe but will not open the safe and must be kept safe.



Enter new master code (example):



Enter new master code again (example):



EMERGENCY POWER SUPPLY:



Hold a 9V Duracell throughout the process to the two connectors and enter your code to open the safe to replace the battery inside



Resetting the user with the Master code



Press the user you want resetting:

Press for User 1

Or

Press for User 2



Press the user you want resetting again:

Press for User 1

Or

Press for User 2



The user codes will be reset to factory codes :

User 1:



User 2:



USER INSTRUCTIONS

SETTING THE TIME DELAY

ON

Enter the Master code (example):



Enter a 3-digit code of which:


The first 2 digits define the Time Delay in minutes (from 00 to 99)

The third digit defines the Opening Window in minutes (from 0 to 9)

(Example) This would be 10 minutes' time delay and 4 minutes Opening Window



Enter the same 3 digits again:

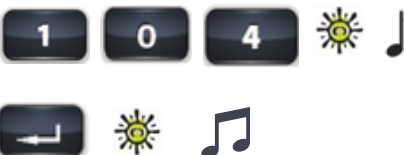

SETTING THE TIME DELAY

ON

Enter the Master code (example):



Press **1** for User 1  

Or

Press **2** for User 2  




Press the user you want resetting again:

Press **1** for User 1  

Or

Press **2** for User 2  

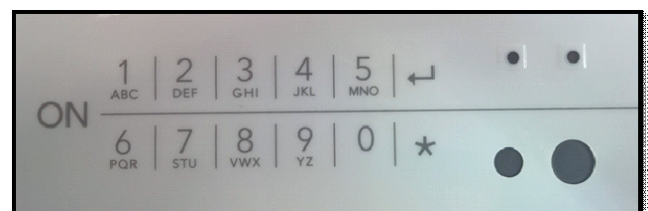

BURTONSAFES
THE SURE DEFENCE

USER INSTRUCTIONS